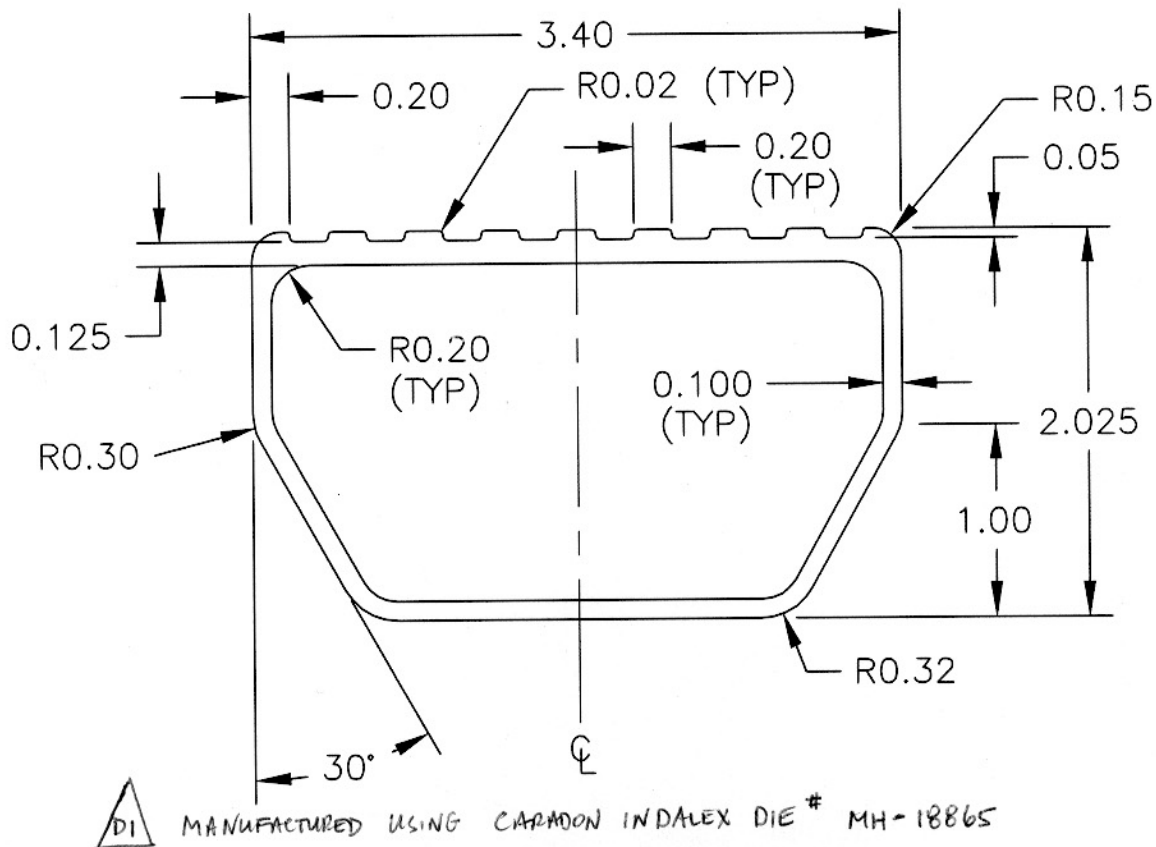


DART

DESIGN BW	DRAWN BY <i>[Signature]</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED <i>KE</i>	APPROVED <i>[Signature]</i>	DRAWING NO. D2244	REV. D SHEET 1 OF 1
DATE 98.11.18	TITLE STEP EXTRUSION		SCALE 1:1
A	94.07.05	NEW ISSUE	
B	94.07.11	REDESIGNED	
C	94.08.08	REDESIGNED	
D	98.11.18	REMOVED 6005A MATERIAL INCORPORATED DEO 9081	
DI	01.04.17	ADDED DIE # <i># 49</i>	

RELEASED
18.11.25 *KE*

PART NUMBER D2244-XX.X
XX.X IS CUT LENGTH IN INCHES

MATERIAL: 6061-T6 (QQ-A-200/8)

A SAMPLE FROM EACH BATCH WILL BE PULL TESTED TO ASTM STANDARD B221 BY AN APPROVED TESTING FACILITY TO ENSURE THAT THE BATCH MEETS THE MINIMUM MECHANICAL PROPERTIES STATED BELOW:

MINIMUM TENSILE YIELD STRENGTH = 35 ksi
MINIMUM ULTIMATE TENSILE STRENGTH = 38 ksi
MINIMUM ELONGATION = 8%

TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED